

CID Book 4 - Procedures for Capacity and Traffic Management

Harmonised texts concerning capacity management, coordination and publication of planned temporary capacity restrictions, traffic management for all corridors

2020 timetable year



Version Control

Version number	Chapter changed	Changes	X marks, which part in the chapter concerned has been changed	
			Common part	Corridor- specific part
1.0		First version		Х

RFC9



Table of contents

1 In	troduc	tion	7
2 C	orridor	OSS	8
2.1	Func	tion	8
2.2	Cont	act	8
2.3	Corri	dor language	8
2.4	Task	s of the C-OSS	8
2.4	.1 Pat	h register	.10
2.5			
3 C		y allocation	
3.1		ework for Capacity Allocation	
3.2		cants	
3.3		irements for requesting capacity	
3.4		al timetable phase	
3.4		ducts	
		PaPs	
		Schematic corridor map	
		Features of PaPs	
	4.1.4	Multiple corridor paths	
	4.1.5	PaPs on overlapping sections	
		Feeder, outflow and tailor-made paths	
		ndling of requests	
		Leading tool for the handling of capacity requests	
		Check of the applications	
		-booking phase	
_	4.3.1	Priority rules in capacity allocation	
	4.3.2	Network PaP	
	4.3.3	Priority rule in case no Network PaP is involved	
	4.3.4	Priority rule if a Network PaP is involved in at least one of the conflicting requests	
	4.3.5	Random selection	
		Special cases of requests and their treatment	
	4.3.7	Result of the pre-booking	
		Handling of non-requested PaPs	
		h elaboration phase	
		Preparation of the (draft) offer	
პ.	4.4.2	Draft offer	.८೮

RFC9



3.4.4.3	Observations	.23
	Post-processing	
3.4.5 Fina	al offer	.24
	path request phase	
	duct	
3.5.1.1	Multiple corridor paths	.25
	Late paths on overlapping sections	
	ndling of requests	
	Leading tool for late path requests	
3.5.2.2	Check of the applications	.25
	-booking	
	h elaboration	
3.5.4.1	Draft offer	.25
3.5.4.2	Observations	.25
3.5.5 Fina	al offer	.26
	oc path request phase	
3.6.1 Pro	duct	.26
	Reserve capacity (RC)	
	Multiple corridor paths	
	Reserve capacity on overlapping sections	
	Feeder, outflow and tailor-made paths	
	ndling of requests	
	Leading tool for ad-hoc requests	
3.6.2.2	Check of the applications	.28
	-booking	
	h elaboration	
	al offer	
3.7 Requ	lest for changes by the applicant	.28
3.7.1 Mod	dification	.28
3.7.2 Witl	hdrawal	.28
3.7.2.1	Overview of withdrawal fees and deadlines	.29
3.7.3 Tra	nsfer of capacity	.29
3.7.4 Car	ncellation	.29
3.7.4.1	Addressing and form of a cancellation	.29
3.7.4.2	Overview of cancellation fees and deadlines	.29
3.7.5 Unu	used paths	.30

CSCORRIDOR

RFC9

3	.7.5.1 Overview of fees and deadlines for unused paths	30
3.8	Exceptional transport and dangerous goods	31
3.8	3.1 Exceptional transport	31
3.8	3.2 Dangerous goods	31
3.9	Rail related services	31
3.10	Contracting and invoicing	31
3.11	Appeal procedure	32
4 C	coordination and publication of planned temporary capacity restrictions	33
4.1	Goals	33
4.2	Legal background	33
4.3	Coordination process	33
4.3	3.1 Coordination	33
4	.3.1.1 First level coordination	33
4	.3.1.2 Criteria for initiating coordination on Corridor level	34
4.4	Conflict resolution process	34
4.5	Involvement of applicants	35
4.6	Publication	35
4.6	S.1 Criteria for publication	35
4.6	5.2 Dates of publication	36
4.6	3.3 Tool for publication	37
4.7	Legal disclaimer	37
5 T	raffic management	37
5.1	Cross-border section information	38
5.1	.1 Technical features and operational rules	38
5.1	.2 Cross-border agreements	38
5.2	Priority rules in traffic management	39
5.3	Traffic management in the event of disturbance	39
5.3	3.1 Communication procedure	39
5.3	3.2 Operational scenarios within RFC in the event of disturbance	40
5.3	3.3 Allocation rules in the event of disturbance	40
5.4	Traffic restrictions	40
5.5	Dangerous goods	40
5.6	Exceptional transport	40
6 T	rain performance management	41
Ann	ex 4.A Framework for Capacity Allocation	42
Ann	ex 4.B Table of deadlines	43



RFC9

Annex 4.C Maps of Corridor Czech - Slovak	.44
Annex 4.D Specialities on specific PaP sections on Corridor Czech - Slovak	.46
Annex 4.E Table of distances (PaP sections)	.46

CSCORRIDOR

1 Introduction

This CID Book 4 describes the procedures for capacity allocation by the Corridor One-Stop-Shop (C-OSS established by the Management Board (MB) of Corridor Czech – Slovak consisting of the Infrastructure Managers (IMs) / Allocation Bodies (ABs) on the Corridor), planned Temporary Capacity Restrictions (TCRs), Traffic Management and Train Performance Management on the Rail Freight Corridors.

All rules concerning applicants, the use of the C-OSS and its products — Pre-Arranged Paths (PaPs) and Reserve Capacity (RC) — and how to order them are explained here. The processes, provisions and steps related to PaPs and RC refer to the Regulation (EU) No 913/2010 and are valid for all applicants. For all other issues, the relevant conditions presented in the Network Statements of the IMs/ABs concerned are applicable.

In addition, specific rules and terms on capacity allocation are applicable to parts of the corridors which the management board of the particular corridors decide. These rules and terms are described and defined in Annex 4 of the *Framework for Capacity Allocation* document and refer to the pilot that is being conducted to test the results of the RNE-FTE project 'Redesign of the international timetabling process' (TTR) on the following lines:

The lines concerned are

- > RFC North Sea-Mediterranean: Rotterdam Antwerp
- > RFC Scandinavian-Mediterranean: Munich Verona
- > RFC Atlantic: Mannheim Miranda de Ebro



These specific rules are not applied on Czech – Slovak Corridor.

For all other sections of the above corridors, the rules described in this Book 4 apply.

This document is revised every year and it is updated before the start of the yearly allocation process for PaPs. Changes in the legal basis of this document (e.g. changes in EU regulations, Framework for Capacity Allocation or national regulations) will be implemented with each revision. Any changes during the running allocation process will be communicated directly to the applicants through publication on Corridor Czech – Slovak's website.

For ease of understanding and to respect the particularities of some corridors, common procedures are always written at the beginning of a chapter. The particularities of Corridor Czech – Slovak are placed under the common texts and marked as shown below.

CS-Corridor CSCORRIDOR

The corridor specific parts are displayed in this frame.

A general glossary can be found in the annex of the CID Book 1 containing relevant terms and abbreviations for this Book 4, which is available on the website of the Corridor under the following link.

CS-Corridor CS-CORRIDOR

There is no glossary published on RFC Czech-Slovak website.



2 Corridor OSS

According to Article 13 of the Regulation (EU) No 913/2010, the MB of Corridor Czech – Slovak has established a C-OSS. The tasks of the C-OSS are carried out in a non-discriminatory way and maintain confidentiality regarding applicants.

2.1 Function

The C-OSS is the only body where applicants may request and receive the dedicated infrastructure capacity for international freight trains on Corridor Czech-Slovak. The handling of the requests takes place in a single place and a single operation. The C-OSS is exclusively responsible for performing all the activities related to the publication and allocation decision with regard to requests for PaPs and RC on behalf of the IMs / ABs concerned.

2.2 Contact

○ RFC 9 CSCORRIDOR

CS-Corridor

Správa železniční dopravní cesty, státní organizace Křižíkova 552/2, 186 00 Praha 8 Czech Republic

Klemensova 8, 813 61 Bratislava Slovenská republika

Železnice Slovenskej republiky

Phone: + 420 972 244 556 (head of office)

+ 420 972 244 606

Phone: + 421 2 2029 3024 (head of office)

+ 421 2 2029 2552 + 421 2 2029 3025

E-mail: oss@rfc9.eu

Web: www.rfc9.eu, www.cskorridor.eu; www.cskoridor.eu, www.rfc-czech-slovak.eu

2.3 Corridor language

The official language of the C-OSS for correspondence is English.

○ RFC 9 CSCORRIDOR

CS-Corridor

Czech and Slovak languages are other official languages of the Corridor Czech – Slovak.

2.4 Tasks of the C-OSS

The C-OSS executes the tasks below during the following processes:

- Collection of international capacity wishes:
 - Consult all interested applicants in order to collect international capacity wishes and needs for the annual timetable by having them fill in a survey. This survey will be sent by the C-OSS to the applicants and/or published on the Corridor's website. The results of the survey will be one part of the inputs for the predesign of PaP offer. It is important to stress that under no circumstances the Corridor can guarantee the fulfilment of all expressed capacity wishes, nor will there be any priority in allocation linked to the provision of similar capacity.



Predesign of PaP offer:

 Give advice on the capacity offer, based on input received from the applicants, and the experience of the C-OSS and IMs/ABs, based on previous years and the results of the Transport Market Study

Construction phase

 Monitor the PaP/RC construction to ensure harmonised border crossing times, running days calendar and train parameters

Publication phase

- Publish the PaP catalogue at X-11 in the Path Coordination System (PCS)
- Inspect the PaP catalogue in cooperation with IMs/ABs, perform all needed corrections of errors detected by any of the involved parties until X-10.5
- Publish offer for the late path request phase (where late path offer is applicable) in PCS
- Publish the RC at X-2 in PCS
- Allocation phase: annual timetable (annual timetable process)
 - Collect, check and review all requests for PaPs including error fixing when possible
 - Create a register of the applications and keep it up-to-date
 - Manage the resolution of conflicting requests through consultation where applicable
 - In case of conflicting requests, take a decision on the basis of priority rules adopted by the Executive Board (Ministries responsible for transport) along Corridor Czech – Slovak (see Framework for Capacity Allocation (FCA) in Annex 4.A)
 - Propose alternative PaPs, if available, to the applicants whose applications have a lower priority value (K value) due to a conflict between several path requests
 - Transmit path requests that cannot be treated to the IM/AB concerned, in order for them to elaborate tailor-made offers
 - Pre-book capacity and inform applicants about the results at X-7.5
 - Allocate capacity (PaPs) in conformity with the relevant international timetabling deadlines and processes as defined by RailNetEurope (RNE) and according to the allocation rules described in the FCA
 - Monitor the construction of feeder and/or outflow paths by sending these requests to the IMs/ABs concerned and obtain their responses/offers. In case of non-consistent offers (e.g. non-harmonised border times), ask for correction
 - Send the responses/offers (draft offer and final offer including feeder and outflow) to the applicants on behalf of the IMs/ABs concerned
 - Keep the PaP catalogue updated



- Allocation phase: late path requests (annual timetable process)
 - Collect, check and review all requests for the late path request phase where applicable - including error fixing when possible
 - o Allocate capacity for the late path request phase where applicable
 - Monitor the construction of feeder and/or outflow paths by sending these requests to the IMs/ABs concerned and obtain their responses/offers. In case of non-consistent offers (e.g. non-harmonised border times), ask for correction
 - Send the responses/offers to the applicants on behalf of the IMs/ABs concerned
 - Keep the concerned catalogue updated
- Allocation phase: ad-hoc requests (RC) (running timetable process)
 - o Collect, check and review all requests for RC including error fixing when possible
 - Create a register of the applications and keep it up-to-date
 - Allocate capacity for RC
 - Monitor the construction of feeder and/or outflow paths by sending these requests to the IMs/ABs concerned and obtain their responses/offers. In case of non-consistent offers (e.g. non-harmonised border times), ask for correction
 - Send the responses/offers to the applicants on behalf of the IMs/ABs concerned
 - Keep the RC catalogue updated

2.4.1 Path register

The C-OSS manages and keeps a path register up-to-date for all incoming requests, containing the dates of the requests, the names of the applicants, details of the documentation supplied and of incidents that have occurred. A path register shall be made freely available to all concerned applicants without disclosing the identity of other applicants, unless the applicants concerned have agreed to such a disclosure. The contents of the register will only be communicated to them on request.

2.5 Tool

PCS is the single tool for publishing the binding PaP and RC offer of the corridor and for placing and managing international path requests on the corridor. Access to the tool is free of charge and granted to all applicants who have a valid, signed PCS User Agreement with RNE. To receive access to the tool, applicants have to send their request to RNE via support.pcs@rne.eu.

Applications for PaPs/RC can only be made via PCS to the involved C-OSS. If the application is made directly to the IMs/ABs concerned, they inform the applicant that they have to place a correct PaP request in PCS via the C-OSS according to the applicable deadlines. PaP capacity requested only through national tools will not be allocated.

In other words, PaP/RC applications cannot be placed through any other tool than PCS.



3 Capacity allocation

The decision on the allocation of PaPs and RC on the corridor is taken by the C-OSS on behalf of the IMs/ABs concerned. As regards feeder and/or outflow paths, the allocation decision is made by the relevant IMs/ABs and communicated to the applicant by the C-OSS. Consistent path construction containing the feeder and outflow sections and the corridor-related path section has to be ensured.

All necessary contractual relations regarding network access have to be dealt with bilaterally between the applicant and each individual IM/AB.

3.1 Framework for Capacity Allocation

Referring to Article 14.1 of Regulation (EU) No 913/2010, the Executive Boards of the Rail Freight Corridors agreed upon a common Framework: "Decision of the Executive Board of Rail Freight Corridor Czech – Slovak adopting the Framework for capacity allocation on the Rail Freight Corridor" (FCA), which was signed by representatives of the ministries of transport on 19. 12. 2016. The document is available under:

Annex 4.A Framework for Capacity Allocation



http://www.szdc.cz/en/rfc9/dokumenty.html

The FCA constitutes the legal basis for capacity allocation by the C-OSS.

3.2 Applicants

In the context of a Corridor, an applicant means a railway undertaking or an international grouping of railway undertakings or other persons or legal entities, such as competent authorities under Regulation (EC) No 1370/2007 and shippers, freight forwarders and combined transport operators, with a commercial interest in procuring infrastructure capacity for rail freight.

Applicants shall accept the general terms and conditions of the Corridor in PCS before placing their requests.

Without accepting the general terms and conditions, the applicant will not be able to send the request. In case a request is placed by several applicants, every applicant requesting PaP sections has to accept the general terms and conditions for each corridor on which the applicant is requesting a PaP section. In case one of the applicants only requests a feeder or outflow section, the acceptance of the general terms and conditions is not needed.

The acceptance shall be done only once per applicant and per corridor and is valid for one timetable period.

With the acceptance the applicant declares that it:

- ▶ has read, understood and accepted the Corridor Czech Slovak CID and, in particular, its Book 4,
- complies with all conditions set by applicable legislation and by the IMs/ABs involved in the paths it has requested, including all administrative and financial requirements,
- shall provide all data required for the path requests,



accepts the provisions of the national Network Statements (NS) applicable to the path(s) requested.

In case of a non-RU applicant, it shall appoint the RU that will be responsible for train operation and inform the C-OSS and IMs/ABs about this RU as early as possible, but at the latest 30 days before the running day. If the appointment is not provided by this date, the PaP/RC is considered as cancelled, and national rules for path cancellation are applicable.

In case the applicant is a non-RU applicant, and applies for feeder / outflow paths, the national rules for nomination of the executing RU will be applied. In the table below the national deadlines for nomination of the executing RU feeder / outflow paths can be found.

CS-Corridor CSCORRIDOR

An overview of the deadlines of the IMs/ABs on Corridor Czech – Slovak (extract from the different Network Statements) is listed below.

Czech Republic: Time of Path Request; Slovakia: 30 days before train run;

3.3 Requirements for requesting capacity

Corridor Czech – Slovak applies the international timetabling deadlines defined by RNE for placing path requests as well as for allocating paths (for the calendar, see http://www.rne.eu/sales-timetabling/timetabling-calender/ or Annex 4.B)

All applications have to be submitted via PCS, which is the single tool for requesting and managing capacity on all corridors. The C-OSS is not entitled to create PCS dossiers on behalf of the applicant. If requested the C-OSS can support applicants in creating the dossiers in order to prevent inconsistencies and guide the applicants' expectations (until X-8.5, maximum 1 week prior to the request deadline). The IMs/ABs may support applicants by providing a technical check of the requests.

A request for international freight capacity via the C-OSS has to fulfil the following requirements:

- ➤ it must be submitted to a C-OSS by using PCS, including at least one PaP/RC section (for access to PCS, see chapter 2.5. Details are explained in the PCS User Manual http://cms.rne.eu/pcs/pcs-documentation/pcs-basics)
- > it must cross at least one border on a corridor
- it must comprise a train run from origin to destination, including PaP/RC sections on one or more corridors as well as feeder and/or outflow paths, on all of its running days. In certain cases, which are due to technical limitations of PCS, a request may have to be submitted in the form of more than one dossier. These specific cases are the following:
 - Different origin and/or destination depending on running day (But using identical PaP/RC capacity for at least one of the IMs for which capacity was requested).
 - Transshipment from one train onto different trains (or vice versa) because of infrastructure restrictions.
 - The IM/AB specifically asks the applicant to split the request into two or more dossiers.



- To be able for the C-OSS to identify such dossiers as one request, and to allow a correct calculation of the priority value (K value) in case a request has to be submitted in more than one dossier, the applicant should indicate the link among these dossiers in PCS. Furthermore, the applicant should mention the reason for using more than one dossier in the comment field.
- the technical parameters of the path request have to be within the range of the parameters – as originally published – of the requested PaP sections (exceptions are possible if allowed by the IM/AB concerned, e.g. when the timetable of the PaP can be respected)
- as regards sections with flexible times, the applicant may adjust/insert times, stops and parameters according to its individual needs within the given range.

3.4 Annual timetable phase

3.4.1 Products

3.4.1.1 PaPs

PaPs are a joint offer of coordinated cross-border paths for the annual timetable produced by IMs/ABs involved in the Corridor. The C-OSS acts as a single point of contact for the publication and allocation of PaPs.

PaPs constitute an off-the-shelf capacity product for international rail freight services. In order to meet the applicants' need for flexibility and the market demand on Corridor [Corridor Name], PaPs are split up in several sections, instead of being supplied as entire PaPs, as for example from [Start Point(s)] to [End Point(s)]. Therefore, the offer might also include some purely national PaP sections – to be requested from the C-OSS for freight trains crossing at least one border on a corridor in the context of international path applications.

A catalogue of PaPs is published by the C-OSS in preparation of each timetable period. It is published in PCS and on the Corridor's website.

CS-Corridor CS-Corridor


The PaP catalogue can be found under the following link:

http://www.szdc.cz/en/rfc9/dokumenty.html

PaPs are published in PCS at X-11. Between X-11 and X-10.5 the C-OSS is allowed to perform, in PCS, all needed corrections of errors regarding the published PaPs detected by any of the involved parties. In this phase, the published PaPs have 'read only' status for applicants, who may also provide input to the C-OSS regarding the correction of errors.



3.4.1.2 Schematic corridor map

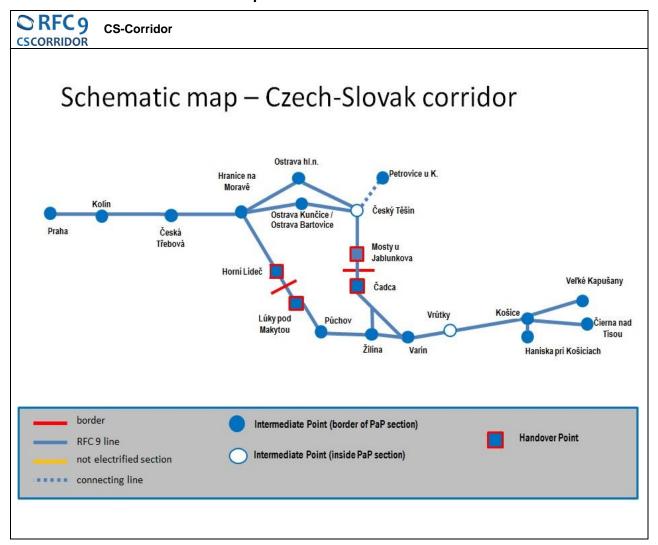

Symbols in schematic corridor map:

Nodes along the Corridor [Corridor Name], shown on the schematic map, are divided into the following types:

Handover Point

Point where planning responsibility is handed over from one IM to another. Published times cannot be changed.

In case there are two consecutive Handover Points, only the departure time from the first Handover Point and the arrival time at the second Handover Point cannot be changed.

On the maps, this is shown as:

Handover Point

> Intermediate Point

Feeder and outflow connections are possible. If the path request ends at an intermediate point without indication of a further path, feeder/outflow or additional PaP section, the destination terminal / parking facility of the train can be mentioned. Intermediate Pointsalso allow stops for train handling, e.g. loco change, driver change, etc. An Intermediate Point can be combined with a Handover Point.



On the maps, this is shown as:

- o Intermediate Point
- Intermediate Point combined with Handover Point
- Operational Point

Train handling (e.g. loco change, driver change) are possible as defined in the PaP section. No feeder or outflow connections are possible.

On the maps, this is shown as:

A Operational Point

A schematic map of the Corridor can be found in Annex 4.C [Large version of the schematic corridor map to be placed in this Annex].

3.4.1.3 Features of PaPs

The capacity offer on a Corridor has the following features:

A PaP timetable is published containing:

- > Sections with fixed times (data cannot be modified in the path request by an applicant)
 - Capacity with fixed origin, intermediate and destination times within one IM/AB.
 - Intermediate points and operational points (as defined in 3.4.1.2) with fixed times. Request for changes to the published PaP have to be examined by the IMs/ABs concerned and can only be accepted if they are feasible and if this does not change the calculation of the priority rule in case of conflicting requests at X-8.
- Sections with flexible times (data may be modified in the path request by an applicant according to individual needs, but without exceeding the given range of standard running times, stopping times and train parameters. Where applicable, the maximum number of stops and total stopping time per section has to be respected).
 - Applicants are free to include their own requirements in their PaP request within the parameters mentioned in the PaP catalogue.
 - Where applicable, the indication of standard journey times for each corridor section has to be respected.
 - Optional: Intermediate Points (as defined in Chapter 3.4.1.2) without fixed times. Other points on the Corridor may be requested.
 - Optional: Operational Points (as defined in Chapter 3.4.1.2) without fixed times.

Requests for changes outside of the above-mentioned flexibility have to be examined by the IMs/ABs concerned if they accept the requests. The changes can only be accepted if they are feasible.

The C-OSS promotes the PaPs by presenting them to existing and potential applicants.





CS-Corridor CS-Corridor

Flex PaPs are offered on the sections in both Czech Republic and Slovakia.

3.4.1.4 Multiple corridor paths

It is possible for capacity requests to cover more than one corridor. A PaP offer harmonised by different corridors may be published and indicated as such. The applicant may request PaP sections on different corridors within one request. Each C-OSS remains responsible for allocating its own PaP sections, but the applicant may address its questions to only one of the involved C-OSSs, who will coordinate with the other concerned C-OSSs whenever needed.

SFC9 CS-Corridor

Corridor Czech – Slovak provides multiple corridor paths with RFC Corridor Baltic-Adriatic for the traffic between Czech Republic and Poland. These paths are coordinated with RFC Corridor Baltic-Adriatic and marked with special PaP ID and highlighted in PaP Catalogue.

3.4.1.5 PaPs on overlapping sections

The layout of the corridor lines leads to situations where some corridor lines overlap with others. The aim of the corridors, in this case, is to prepare the best possible offer, taking into account the different traffic flows and to show the possible solutions to link the concerning overlapping sections with the rest of the corridors in question.

In case of overlapping sections, corridors may develop a common offer, visible via all corridors concerned. These involved corridors will decide which C-OSS is responsible for the final allocation decision on the published capacity. In case of conflict, the responsible C-OSS will deal with the process of deciding which request should have priority together with the other C-OSSs. In any case, the applicant will be consulted by the responsible C-OSS.

CS-Corridor CSCORRIDOR

Corridor Czech – Slovak has no common offer on overlapping sections.


3.4.1.6 Feeder, outflow and tailor-made paths

In case available PaPs do not cover the entire requested path, the applicant may include a feeder and/or outflow path to the PaP section(s) in the international request addressed to the C-OSS via PCS in a single request.

A feeder/outflow path refers to any path section prior to reaching an intermediate point on a corridor (feeder path) or any path section after leaving a corridor at an intermediate point (outflow path).

Feeder and outflow paths will be constructed on request in the PCS dossiers concerned by following the national path allocation rules. The offer is communicated to the applicant by the C-OSS within the same time frame available for the communication of the requested PaPs. Requesting a tailor-made path between two PaP sections is possible, but because of the difficulty for IMs/ABs to link two PaP sections, a suitable offer might be less likely (for further explanation see 3.4.3.6).

Graph with possible scenarios for feeder/outflow paths in connection with a request for one or more PaP section(s):

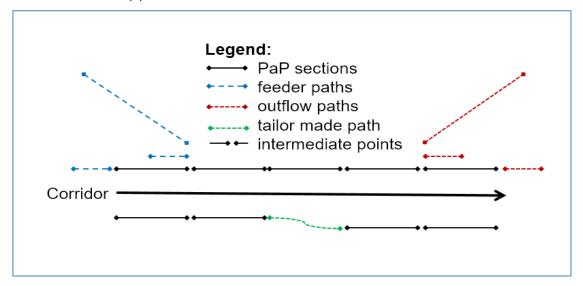

3.4.2 Handling of requests

The C-OSS publishes the PaP catalogue at X-11 in PCS, inspects it in cooperation with IMs/ABs, and performs all needed corrections of errors detected by any of the involved parties until X-10.5. Applicants can submit their requests until X-8. The C-OSS offers a single point of contact to applicants, allowing them to submit requests and receive answers regarding corridor capacity for international freight trains crossing at least one border on a corridor in one single operation. If requested, the C-OSS can support applicants in creating the dossiers in order to prevent inconsistencies and guide the applicants' expectations. The IMs/ABs may support the applicants by providing a technical check of the requests.

3.4.2.1 Leading tool for the handling of capacity requests

Applicants sending requests to the C-OSS shall use PCS. Within the construction process of feeder and/or outflow paths and tailor-made paths, the national tool may show additional information to the applicant.

The following matrix shows for each step of the process which tool is considered as the leading tool.

Phase	Application (till X-8)	Withdrawal (X-8 till X-5)	Modification (X-8 till X-5)	Pre-booking (X-7.5)	Draft offer (X-5)	Observation (X-5 till X-4)	Final offer (x-3.5)	Acceptance (until X-3)	Modification (after X-4)	Cancellation (after X-4)
Leading tool	PCS	PCS	PCS	PCS	PCS	PCS	PCS	PCS	National tool/PCS	National tool/PCS
Additional				Email						
tool				(for pre-booking						
				information)						

ORFC9	CS-Corridor
CSCORRIDOR	

All requests for modification and/or cancellation must be placed by IM's national tool only.



3.4.2.2 Check of the applications

The C-OSS assumes that the applicant has accepted the published PaP characteristics by requesting the selected PaP. However, for all incoming capacity requests it will perform the following plausibility checks:

- > Request for freight train using PaP and crossing at least one border on a corridor
- Request without major change of parameters

If there are plausibility flaws, the C-OSS may check with the applicant whether these can be resolved:

- if the issue can be solved, the request will be corrected by the C-OSS (after the approval of the applicants concerned) and processed like all other requests. The applicant has to accept or reject the corrections within 5 calendar days. In case the applicant does not answer or reject the corrections, the C-OSS forwards the original request to the IM/AB concerned.
- if the issue cannot be resolved, the request will be rejected.

All requests not respecting the published offer are immediately forwarded by the C-OSS to the IM/AB concerned for further treatment. In those cases, answers are provided by the involved IM/AB. The IMs/ABs will accept them as placed in time (i.e. until X-8).



Checks of the C-OSS additional steps: no additional steps on Corridor Czech – Slovak

In case of missing or inconsistent data the C-OSS directly contacts the leading applicant and asks for the relevant data update/changes to be delivered within 5 calendar days.

In general: in case a request contains PaPs on several corridors, the C-OSSs concerned check the capacity request in cooperation with the other involved C-OSS(s) to ensure their cooperation in treating multiple corridor requests. This way, the cumulated length of PaPs requested on each corridor is used to calculate the priority value (K value) of possible conflicting requests (see more details in Chapter 3.4.3.1). The different corridors can thus be seen as part of one combined network.

3.4.3 Pre-booking phase

In the event of conflicting requests for PaPs placed until X-8, a priority rule is applied. The priority rules are stated in the FCA (Annex 4.A) and in Chapter 3.4.3.1.

On behalf of the IMs/ABs concerned and according to the result of the application of the priority rules - as detailed in 3.4.3.1 - the C-OSS pre-books the PaPs.

The C-OSS also forwards the requested feeder/outflow path and/or adjustment to the IMs/ABs concerned for elaboration of a timetable offer fitting to the PaP already reserved (pre-booked), just as might be the case with requests with a lower priority value (cfr. priority rule process below) will be handled in the following order:

- consultation may be applied
- alternatives may be offered (if available)

 if none of the above steps were applied or successful, the requested timetable will be forwarded to the IMs/ABs concerned to elaborate a tailor-made offer as close as possible to the initial request.

3.4.3.1 Priority rules in capacity allocation

Conflicts are solved with the following steps, which are in line with the FCA:

- A) A resolution through consultation may be promoted and performed between applicants and the C-OSS, if the following criteria are met:
 - The conflict is only on a single corridor
 - Suitable alternative PaPs are available.
- B) Applying the priority rule as described in Annex 1 of the FCA (see Annex 4.A) and Chapter 3.4.3.2 of this Book 4.
 - a. Cases where no Network PaP is involved (see 3.4.3.3)
 - b. Cases where Network PaP is involved in at least one of the requests (see 3.4.3.4)

The Table of Distances in Annex 4.E shows the distances taken into account in the priority calculation.

C) Random selection (see 3.4.3.5).

In the case that more than one PaP is available for the published reference PaP, the C-OSS pre-books the PaPs with the highest priority until the published threshold is reached. When this threshold is reached, the C-OSS will apply the procedure for handling requests with a lower priority as listed above.



Corridor Czech – Slovak does not apply the resolution through consultation.

3.4.3.2 Network PaP

A Network PaP is not a path product. However, certain PaPs may be designated by corridors as 'Network PaPs', in most cases for capacity requests involving more than one corridor. Network PaPs are designed to be taken into account for the definition of the priority of a request, for example on PaP sections with scarce capacity. The aim is to make the best use of available capacity and provide a better match with traffic demand.

Corridor Czech – Slovak does not designate any Network PaPs.

3.4.3.3 Priority rule in case no Network PaP is involved

The priority is calculated according to this formula:

$$K = (L^{PAP} + L^{F/O}) \times Y^{RD}$$

CSCORRIDOR

 L^{PAP} = Total requested length of all PaP sections on all involved corridors included in one request. The definition of a request can be found in Chapter 3.3.

 $L^{F/O}$ = Total requested length of the feeder/outflow path(s) included in one request; for the sake of practicality, is assumed to be the distance as the crow flies.

 Y^{RD} = Number of requested running days for the timetable period. A running day will only be taken into account for the priority calculation if it refers to a date with a published PaP offer for the given section.

K = The rate for priority

All lengths are counted in kilometres.

The method of applying this formula is:

- in a first step the priority value (K) is calculated using only the total requested length of pre-arranged path (LPAP) multiplied by the Number of requested running days (YRD);
- if the requests cannot be separated in this way, the priority value (K) is calculated using the total length of the complete paths ($L^{PAP} + L^{F/O}$) multiplied by the number of requested running days (Y^{RD}) in order to separate the requests;
- if the requests cannot be separated in this way, a random selection is used to separate the requests. This random selection is described in 3.4.3.5.

3.4.3.4 Priority rule if a Network PaP is involved in at least one of the conflicting requests

- If the conflict is not on a "Network PaP", the priority rule described above applies.
- If the conflict is on a "Network PaP", the priority is calculated according to the following formula:

$$K = (L^{NetPAP} + L^{Other\ PAP} + L^{F/O}) \times Y^{RD}$$

K = Priority value

 L^{NetPAP} = Total requested length (in kilometres) of the PaP defined as "Network PaP" on either corridor included in one request. The definition of a request can be found in Chapter 3.3.

 $L^{Other\ PAP}$ = Total requested length (in kilometres) of the PaP not defined as "Network PaP" on either corridor included in one request. The definition of a request can be found in Chapter 3.3.

 $L^{F/O}$ = Total requested length of the feeder/outflow path(s) included in one request; for the sake of practicality, is assumed to be the distance as the crow flies.

 Y^{RD} = Number of requested running days for the timetable period. A running day will only be taken into account for the priority calculation if it refers to a date with a published PaP offer for the given section.

The method of applying this formula is:

- in a first step the priority value (K) is calculated using only the total requested length of the "Network PaP" (L^{NetPAP}) multiplied by the Number of requested running days (Y^{RD})
- if the requests cannot be separated in this way, the priority value (K) is calculated using the total length of all requested "Network PaP" sections and other PaP sections (L^{NetPAP} + L^{Other PAP}) multiplied by the Number of requested running days (YRD) in order to separate the requests



- if the requests cannot be separated in this way, the priority value (K) is calculated using the total length of the complete paths ($L^{NetPAP} + L^{Other\ PAP} + L^{F/O}$) multiplied by the Number of requested running days (Y^{RD}) in order to separate the requests

If the requests cannot be separated in this way, a random selection is used to separate the requests.

3.4.3.5 Random selection

If the requests cannot be separated by the above-mentioned priority rules, a random selection is used to separate the requests.

- ➤ The respective applicants will be acknowledged of the undecided conflict before X-7.5 and invited to attend a drawing of lots.
- > The actual drawing will be prepared and executed by the C-OSS, with complete transparency.
- > The result of the drawing will be communicated to all involved parties, present or not, via PCS and e-mail, before X-7.5.




Details about random selections can be provided by C-OSS.

3.4.3.6 Special cases of requests and their treatment

The following special use of PaPs is known out of the allocation within the past timetables:

Division of continuous offer in shares identified by the PaP ID (PaPs / non-PaPs)

- ➤ This refers to the situation when applicants request corridor capacity (on one or more corridors) in the following order:
 - PaP section
 - Tailor-made section
 - o PaP section

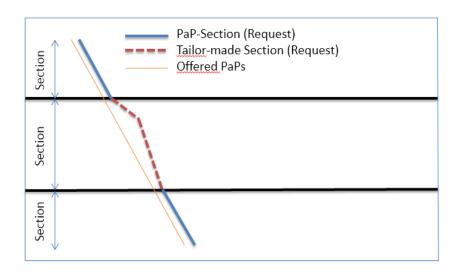



These requests will be taken into consideration, depending on the construction starting point in the request, as follows:

- Construction starting point at the beginning: The C-OSS pre-books the PaP sections from origin until the end of the first continuous PaP section. No section after the interruption of PaP sections will be pre-booked; they will be treated as tailor-made.
- Construction starting point at the end: The C-OSS pre-books the PaP sections from the destination of the request until the end of the last continuous PaP section. No sections between the origin and the interruption of the PaP sections will be pre-booked; they will be treated as tailor-made.
- Construction starting point in the middle: The C-OSS pre-books the longest of the requested PaP sections either before or after the interruption. No other section will be pre-booked; they will be treated as tailor-made.

However, in each of the above cases, the requested PaP capacity that becomes tailor-made might be allocated at a later stage if the IMs/ABs can deliver the tailor-made share as requested. In case of allocation, the PaP share that can become tailor-made retains full protection. This type of request doesn't influence the application of the priority rule.

3.4.3.7 Result of the pre-booking

The C-OSS provides interim information to applicants regarding the status of their application no later than X-7.5.

In the case that consultation was applied, the concerned applicants are informed of the outcome.

In the case that no consultation was applied, the interim notification informs applicants with a higher priority value (K value) about pre-booking decisions in their favour.

In case of conflicting requests with a lower priority value, the C-OSS shall offer an alternative PaP, if available. The applicant concerned has to accept or reject the offered alternative within 5 calendar days. In case the applicant does not answer, or rejects the alternative, or no alternative is available, the C-OSS forwards the original request to the IM/AB concerned. The C-OSS informs the applicants with a lower priority value (K value) by X-7.5 that their path request has been forwarded to the IM/AB concerned for further treatment within the regular process for the annual timetable construction, and that the C-OSS will provide the draft path offer on behalf of the IM/AB concerned at X-5 via PCS. These applications are handled by the IM/AB concerned as on-time applications for the annual timetable and are therefore included in the regular national construction process of the annual timetable.

3.4.3.8 Handling of non-requested PaPs

There are two ways of handling non-requested PaPs at X-7.5, based on the decision of the MB.

- A) After pre-booking, all non-requested PaPs are handed over to the IM/AB.
- B) The MB takes a decision regarding the number of PaPs to be kept after X-7.5. The decision on which PaPs to keep and which PaPs to return to the relevant IMs/ABs depends on the "booking situation" at that moment. More precisely, at least the following three criteria must be used (by decreasing order of importance):
 - a. There must be enough capacity for late requests, if applicable, and RC.
 - b. Take into account the demand for international paths for freight trains placed by other means than PCS.



c. Take into account the need for modification of PaP offer due to possible changes in the planning of TCRs.

PaP capacity which is returned to IMs/ABs are cleared from the published PaP offer, unless each IM/AB individually decides to withdraw them entirely from PCS in order to free capacity on their network.

The remaining PaPs are published during the late request phase (where applicable) in PCS with continuous updating.

CS-Corridor CS-CORRIDOR

Corridor Czech – Slovak handles non-requested PaPs according to B above.

3.4.4 Path elaboration phase

3.4.4.1 Preparation of the (draft) offer

After receiving the pre-booking decision by the C-OSS, the IM/AB concerned will elaborate the flexible parts of the requests:

- Feeder, outflow or intermediate sections
- Pre-booked sections for which the published timetable is not available anymore due to external influences, e.g. temporary capacity restrictions
- In case of modifications to the published timetable requested by the applicant
- In case of an alternative offer that was rejected by the applicant or is not available

In case IMs/ABs cannot create the draft offer due to specific wishes of the applicant not being feasible, the C-OSS has to reject the request.

The C-OSSs shall be informed about the progress, especially regarding the parts of the requests that cannot be fulfilled, as well as conflicts and problems in harmonising the path offers.

3.4.4.2 Draft offer

At the RNE draft timetable deadline (X-5) the C-OSS communicates the draft timetable offer for every handled request concerning pre-booked PaPs including feeder and/or outflow to the applicant via PCS on behalf of the IM/AB concerned.

3.4.4.3 Observations

Applicants can place observations on the draft timetable offer in PCS, which are monitored by the C-OSS. The C-OSS can support the applicants regarding their observations. This procedure only concerns observations related to the original path request — whereas modifications to the original path requests are treated as described in Chapter 3.7.1 (without further involvement of the C-OSS).

3.4.4.4 Post-processing

Based on the above-mentioned observations the IMs/ABs have the opportunity to revise offers. The updated offer is provided to the C-OSS, which – after a consistency check – submits the final offer to the applicant in PCS.

CSCORRIDOR

3.4.5 Final offer

At the final offer deadline (X-3.5), the C-OSS communicates the final timetable offer for every valid PaP request including feeder and/or outflow sections to the applicants via PCS on behalf of the IM/AB concerned. If, for operational reasons, publication via national tools is still necessary (e.g. to produce documents for train drivers), the IM/AB have to ensure that there are no discrepancies between PCS and the national tool.

The applicants involved shall accept or reject the final offer within 5 calendar days in PCS.

- Acceptance > leads to allocation
- Rejection > leads to withdrawal and closing of the request
- No answer > The C-OSS will actively try to get an answer. In case there is no answer from the applicants, the C-OSS will end the process (no allocation).

If not all applicants agree on the final offer, the request will be considered as unanswered.

3.5 Late path request phase

Late path requests refer to capacity requests concerning the annual timetable sent to the C-OSS within the time frame from X-7.5 until X-2.



CS-Corridor

Corridor Czech – Slovak offers the possibility to place late path requests.

3.5.1 Product

Capacity for late path requests can be offered in the following ways:

- A. In the same way, as for PaPs, either specially-constructed paths for late path requests or PaPs which were not used for the annual timetable.
- B. On the basis of capacity slots. Slots are displayed per corridor section and the standard running time is indicated. To order capacity for late path requests, corridor sections without any time indications are available in PCS. The applicant may indicate his individually required departure and/or arrival times, and feeder and outflow path(s), as well as construction starting points. The indications should respect the indicated standard running times.

Capacity for late path request has to be requested via PCS either in the same way as for PaPs or by using capacity slots in PCS.

CSCORRIDOR CS-Corridor

Corridor Czech – Slovak offers the possibility to place late path requests by using the variant A.





3.5.1.1 Multiple corridor paths

It is possible for capacity requests to cover more than one corridor if capacity is offered. See Chapter 3.4.1.4.

3.5.1.2 Late paths on overlapping sections

See Chapter 3.4.1.5.

CS-Corridor CS-CORRIDOR

Corridor Czech – Slovak doesn't offer common offer on overlapping sections.

3.5.2 Handling of requests

The C-OSS receives and collects all path requests that are placed via PCS.

3.5.2.1 Leading tool for late path requests

Applicants sending late path requests to the C-OSS shall use PCS. Within the construction process, the national tool may show additional information to the applicant.

The following matrix shows for each step of the process which tool is considered as the leading tool.

Phase	Application (X-7.5 till X-2)	Withdrawal (X-8 till X-2)	Offer (X-1)	Acceptance (until X-0.75)	Modification	Cancellation
Leading tool	PCS	PCS	PCS	PCS	National tool/PCS	National tool/PCS

CS-Corridor CS-CORRIDOR

All requests for modification and/or cancellation must be placed by IM's national tool only.

3.5.2.2 Check of the applications

The C-OSS checks all requests as described in 3.4.2.2.

3.5.3 Pre-booking

The C-OSS coordinates the offer with the IMs/ABs concerned or other C-OSS if needed by following the rule of "first come – first served".

3.5.4 Path elaboration

3.5.4.1 Draft offer

The offer will be prepared by the concerned IM(s)/AB(s) once the timetable with the requests placed on time has been finalised. The offer is made by the C-OSS to the applicant via PCS.

3.5.4.2 Observations

The C-OSS monitors the observations on the draft offer for late path requests placed by the applicant in PCS. The C-OSS can support the applicants regarding their observations. This





procedure only concerns observations related to the original late path request — whereas modifications to the original late path requests are treated as described in Chapter 3.7.1 (without further involvement of the C-OSS).

3.5.4.3 Post-processing

Based on the above-mentioned observations the IMs/ABs have the opportunity to revise offers. The updated offer is provided to the C-OSS, which – after a consistency check – submits the final offer to the applicant in PCS.

3.5.5 Final offer

All applicants involved shall accept or reject the final offer within 5 calendar days in PCS.

- Acceptance > leads to allocation
- Rejection > leads to withdrawal and closing of the request
- No answer > The C-OSS will actively try to get an answer. In case there is still no answer from the applicants, the C-OSS will end the process (no allocation)

If not all applicants agree on the final offer the request will be considered as unanswered.

3.6 Ad-hoc path request phase

3.6.1 Product

3.6.1.1 Reserve capacity (RC)

During the ad-hoc path request phase, the C-OSS offers RC based on PaPs or capacity slots to allow for a quick and optimal answer to ad-hoc path requests:

- A. RC based on PaPs will be a collection of several sections along the corridor, either of non-requested PaPs and/or PaPs constructed out of remaining capacity by the IMs/ABs after the allocation of overall capacity for the annual timetable as well as in the late path request phase.
- B. In case RC is offered on the basis of capacity slots, slots are displayed per corridor section and the standard running time is indicated. The involved IMs/ABs jointly determine the amount of RC for the next timetable year between X-3 and X-2. The determined slots may not be decreased by the IMs during the last three months before real time.
 - To order reserve capacity slots, corridor sections without any time indication are available in PCS. The applicant may indicate his individually required departure and/or arrival times, feeder and outflow path(s) as well as construction starting points. The indications should respect the indicated standard running times as far as possible.



Corridor Czech - Slovak offers RC through variant A.

RC is published by the C-OSS at X-2 in PCS and on the website of Corridor Czech – Slovak under the following link:

CS-Corridor CS-CORRIDOR

http://www.szdc.cz/en/rfc9/dokumenty.html

The IMs can modify or withdraw RC for a certain period in case of unavailability of capacity due to force majeure. Applicants can book RC via the C-OSS until 30 days before the running day. To make ad-hoc requests less than 30 days before the running day, they have to contact the IMs/ABs directly.

3.6.1.2 Multiple corridor paths

It is possible for capacity requests to cover more than one corridor. See Chapter 3.4.1.4.

3.6.1.3 Reserve capacity on overlapping sections

See Chapter 3.4.1.5.

CS-COPPIDOR CS-Corridor

Corridor Czech – Slovak doesn't offer common offers on overlapping sections.

3.6.1.4 Feeder, outflow and tailor-made paths

See Chapter 3.4.1.6. For RC the same concept applies as for PaPs in the annual timetable.

3.6.2 Handling of requests

The C-OSS receives and collects all path requests for RC placed via PCS until 30 days before the running day. If requested the C-OSS can support applicants in creating the dossiers to prevent inconsistencies and guide the applicants' expectations. The IMs/ABs may support the applicants by providing a technical check of the requests.

3.6.2.1 Leading tool for ad-hoc requests

Applicants sending requests for RC to the C-OSS shall use PCS. Within the construction process, the national tool may show additional information to the applicant.

The following matrix shows for each step of the process which tool is considered as the leading tool.

Phase	Application and allocation (X-2 till X+12)	Withdrawal	Offer (10 calendar days before train run)	Answer (within 5 calendar days after offer)	Modification	Cancellation
Leading tool	PCS	PCS	PCS	PCS	National tool/PCS	National tool/PCS

CS-Corridor

All requests for modification and/or cancellation must be placed by IM's national tool only.



3.6.2.2 Check of the applications

The C-OSS checks all requests as described in 3.4.2.2.

3.6.3 Pre-booking

The C-OSS applies the 'first come – first served' rule.

3.6.4 Path elaboration

Applicants can place observations on the draft timetable offer in PCS, which are monitored by the C-OSS. The C-OSS can support the applicants regarding their observations. This procedure only concerns observations related to the original path request — whereas modifications to the original path requests are treated as described in Chapter 3.7.1 (without further involvement of the C-OSS).

3.6.5 Final offer

Applicants shall receive the final offer no later than 10 calendar days before train run. All applicants involved shall accept or reject the final offer within 5 calendar days in PCS.

- Acceptance > leads to allocation
- Rejection > leads to withdrawal and closing of the request
- No answer > The C-OSS will actively try to get an answer. In case there is still no answer from the applicants, the C-OSS will end the process (no allocation)

If not all applicants agree on the final offer, the request will be considered as unanswered.

3.7 Request for changes by the applicant

3.7.1 Modification

The Sector Handbook for the communication between Railway Undertakings and Infrastructure Managers (RU/IM Telematics Sector Handbook) is the specification of the TAF-TSI (EC) No 62/2006 regulation. According to its Annex 12.2 UML Model of the yearly timetable path request, it is not possible to place change requests for paths (even including PaPs) by the applicant between X-8 and X-5. The only option in this period is the deletion, meaning the withdrawal, of the path request.

3.7.2 Withdrawal

Withdrawing a request is only possible

- > After submitting the request (until X-8) until the end of the observation phase
- before allocation during the late path request phase (where applicable) and ad-hoc path request phase.

Resubmitting the withdrawn dossier will be considered as annual request only until X-8.





3.7.2.1 Overview of withdrawal fees and deadlines

CS-Corridor CS-Corridor						
An overview of withdrawal fees and deadlines of the IMs/ABs on Corridor Czech – Slovak (extract from the different Network Statements) is listed below.						
IM	Withdrawal fees and deadlines					
SŽDC	Free of charge					
ŽSR	Free of charge					

3.7.3 Transfer of capacity

Once capacity is pre-booked or allocated to an applicant, it shall not be transferred by the recipient to another applicant. The use of capacity by an RU that carries out business on behalf of a non-RU applicant is not considered a transfer.

3.7.4 Cancellation

Cancellation refers to the phase between final allocation and the train run. Cancellation can refer to one, several or all running days and to one, several or all sections of the allocated path.

3.7.4.1 Addressing and form of a cancellation

In case a path has to be cancelled, for whatever reason, the cancellation has to be done according to national processes.

3.7.4.2 Overview of cancellation fees and deadlines

CS-Corridor CS-CORRIDOR							
An overview of cancellation fees and deadlines of the IMs/ABs on Corridor Czech – Slovak (extract from the different Network Statements) is listed below.							
IM	Cancellation fees and deadlines						
SŽDC	a) Capacity reservation fee (according to Network Statement)	100%					
	b) If the applicant does gives up allocated infrastructure capacity less than thirty calendar days before the planned day of ride or the allocated infrastructure capacity forfeits due to a train delay longer than 1,200 minutes for reasons on the side of the applicant or nobody uses the allocated infrastructure capacity the applicant is obliged to pay to the allocator a sanction.	Maximum 7,- CZK per trainkilometer per day of ride (depending on route classification and time of path cancellation). Some routes are excluded from this fee. For details see the Network Statement – chapter 6.4.1 and Annex "C".					



ŽSR	ŽSR does not charge additional fees for the cancellation of allocated path.	Fee for ordering and allocation of capacity U1 under Regulation of Transport Authority no. 2/2018 shall be charged even if allocated path has been cancelled.
		For details see the Network Statement – chapter 6.2.1 and Annex "6.3.1".

3.7.5 Unused paths

If an applicant or designated RU does not use the allocated path, the case is treated as follows.

3.7.5.1 Overview of fees and deadlines for unused paths

		-	
CS-Corridor CS-Corridor			
An overview of fees and deadlines for unused paths for the IMs/ABs on Corridor Czech – Slovak (extract from the different Network Statements) is listed below.			
IM	Fees for unused paths		
SŽDC	100 % of Reservation fee plus:		
	Maximum 7,- CZK per trainkilometer per day of ride (depending on route classification and time of path cancellation).		
	Some routes are excluded from this fee.		
	For details see the Network Statement – chapter 6.4.1 and Annex "C".		
ŽSR	ŽSR does not charge additional fees for the	Fee for ordering and allocation of capacity U1 under Regulation of Transport Authority no. 2/2018 shall be charged even if allocated path has been cancelled.	
	cancellation of allocated path.	For details see the Network Statement – chapter 6.2.1 and Annex "6.3.1".	

3.8 Exceptional transport and dangerous goods

3.8.1 Exceptional transport

PaPs and RC do not include the possibility to manage exceptional consignments (e.g. out-of-gauge loads). The parameters of the PaPs and RC offered have to be respected, including the published combined traffic profiles.

Requests for exceptional consignments are forwarded by the C-OSS directly to the IMs/ABs concerned for further treatment.

3.8.2 Dangerous goods

Dangerous goods may be loaded on trains using PaPs or RC if both international and national rules concerning the movement of hazardous material are respected (e.g. according to RID – Regulation governing the international transport of dangerous goods by rail).

Dangerous goods have to be declared, when making a path request, to all IMs/ABs on Corridor [Corridor Name].

3.9 Rail related services

Rail related services are specific services, the allocation of which follows national rules and partially other deadlines than those stipulated in the process of path allocation. Therefore the request has to be sent to the IMs/ABs concerned directly.

If questions regarding rail related services are sent to the C-OSS, he/she contacts the IMs/ABs concerned, who provide an answer within a reasonable time frame.

3.10 Contracting and invoicing

Network access contracts are concluded between IMs/ABs and the applicant on the basis of national network access conditions.

The C-OSS does not issue any invoices for the use of allocated paths. All costs (charges for using a path, administration fees, etc.) are invoiced by the relevant IMs/ABs.

Currently, differences between various countries exist regarding invoicing for the path charge. In some countries, if a non-RU applicant is involved, it receives the invoice, whereas in other countries the invoice is issued to the RU that has used the path.

ORFC9	(
CSCORRIDOR	

CS-Corridor

An overview of who has to pay the path charge when a non-RU applicant uses the path on Corridor Czech – Slovak per IM/AB (extract from the different Network Statements) is listed below.

IM	Explanations
SŽDC	RU that used a path, except situation when no RU is assigned. In this case Applicant is charged.
ŽSR	RU that used a path, except situation when no RU is assigned. In this case Applicant is charged.

B) Detailed information about who has to pay the charge when a non-RU applicants uses the path can be found in the Network Statements of IMs/ABs involved in Corridor [Corridor



name]. Links to the Network Statements can be found in Book 2 of this CID.

3.11 Appeal procedure

Based on Article 20 of Regulation (EU) No 913/2010: in case of complaints regarding the allocation of PaPs (e.g. due to a decision based on the priority rules for allocation), the applicants may address the relevant Regulatory Body (RB) as stated in the Cooperation Agreement signed between RBs on the Corridor.

CS-Corridor CS-CORRIDOR

There is no Cooperation Agreement on Corridor Czech-Slovak. Information can be found on websites of RBs.

4 Coordination and publication of planned temporary capacity restrictions

4.1 Goals

Planned Temporary Capacity Restrictions (TCRs) are necessary to keep the infrastructure and its equipment in operational condition and to allow changes to the infrastructure necessary to cover market needs. In case of international traffic, these capacity restrictions have to be coordinated among neighboring countries. In addition, there is a strong customers' demand to know in advance which capacity restrictions they will be confronted with. Infrastructure Managers provide for coordination and publication of the TCRs according to the current legal framework (see 1.2). Notwithstanding the respect of this legal framework and of the national processes for corridor-relevant TCRs, i.e. those TCRs which fulfill the criteria listed in Chapter 4.6.1 RFC's coordination processes might be agreed upon, taking into account the interests of the applicants. The corridor's aim is to do this by regularly updating the information and presenting all planned TCRs in an easily accessible way.

4.2 Legal background

The legal background to this chapter can be found in:

- » Commission Delegated Decision (EU) 2017/2075 replacing Annex VII to Directive 2012/34/EU
- » Regulation (EU) No 913/2010 Article 12 "Coordination of works".

A framework has been developed by RNE in the "Guidelines for Coordination / Publication of Planned Temporary Capacity Restrictions for the European Railway Network" and it is reflected in Czech-Slovak Corridor's specific procedures.

4.3 Coordination process

4.3.1 Coordination

Coordination of corridor-relevant TCRs is carried out according to the following procedure:

4.3.1.1 First level coordination

Coordination will be performed during regular coordination processes between neighbouring IMs on the Corridor. The time and frequency as well as any other specific Czech-Slovak **Corridor**'s coordination features are described in the specific Czech-Slovak **Corridor**'s box below.

CS-Corridor CS-CORRIDOR

The Corridor Czech-Slovak applies the following coordination process:

First level coordination is carried out by bilateral working group between neighbouring IMs. This working group is organised by IMs on their responsibility. Timelines are compliant with the rules set up by Annex VII, mentioned in **Chyba! Nenalezen zdroj odkazů.** Outcomes of these working groups (attendance, TCRs discussed, unsolved conflicts) have to be reported to the RFC TCR coordinator.

If conflicts remain unsolved, they are reported at corridor-level of coordination and solved there.





4.3.1.2 Criteria for initiating coordination on Corridor level

Coordination on Corridor level can be initiated by the RFC TCR Corridor Coordinator if, according to the agreed criteria, the aggregated impacts of the proposed TCR exceed these agreed limits/criteria. The RFC TCR Coordinator informs the MB of the Corridor of the exceedance of those limits/criteria and proposes further coordination.

CS-Corridor CS-CORRIDOR

The Corridor Czech-Slovak applies the following criteria for initiating coordination on Corridor level:

Due to Regulation (EU) 913/2010 (12) RFCs have the obligation to ensure coordination and publication of TCRs. RFCs can define criteria (e. g. impact on freight traffic, duration of TCR etc.) for initiating coordination on RFC level. All TCRs, which meet at least one criterion, have to be submitted to the RFC TCR Coordinator by the involved IMs. Coordination on RFC level will then be initiated by the RFC TCR Coordinator with the aim to investigate:

- the combined impact of all the TCRs on the respective networks of the corridor is still acceptable,
- the availability of capacity on diversionary lines, and
- the possibility to give a capacity offer

The RFC TCR Coordinator organizes coordination meetings according to the internal rules of the Corridor.

4.4 Conflict resolution process

Unsolved conflicts on Corridor lines shall be reported to Czech-Slovak Corridor's MB.

IMs involved in the conflict will initiate the conflict-resolution process (e.g. by initiating specific bi/multi-lateral meetings). The specific Czech-Slovak corridor's process is described in the box below.

CSCORRIDOR CS-Corridor

Conflict resolution process on Czech-Slovak Corridor.

Conflicts primarily have to be solved at first level coordination. (4.3.2)

If conflicts remain unsolved, they are reported in to the coordination on RFC level or assigned to a higher level within the IMs' organizations to be solved there.





4.5 Involvement of applicants

Each IM has its own national processes and platforms to consult the applicants and inform them about TCRs. These processes are described in the Network Statement of each IM.

At Corridor level, the involvement of applicants is organised in the following way:

CSCORRIDOR CS-

CS-Corridor

Conflict resolution process on Czech-Slovak Corridor.

- 1) OPTION 1: The results of the TCRs coordination that are relevant for principal and diversionary lines of Corridor Czech-Slovak Corridor are published on Corridor Czech-Slovak Corridor's website. Applicants may send their comments on the planned activities to the involved IM(s). The comments of applicants have an advisory and supportive character and shall be taken into consideration as far as possible.
- 2) Regular meetings of the Railway Undertaking Advisory Group (RAG) and Terminal Advisory Group (TAG) are used to discuss issues related with TCRs.
- 3) Additional meetings with applicants, to discuss and resolve open issues, will be treated on a case by case basis.

OPTION 2: any other text that the Corridor finds fit

4.6 Publication

4.6.1 Criteria for publication

	Consecutive days	Impact on traffic (estimated traffic cancelled, re-routed or replaced by other modes of transport)
Major impact TCR ¹	More than 30 consecutive days	More than 50% of the estimated traffic volume on a railway line per day
High impact TCR ¹	More than 7 consecutive days	More than 30% of the estimated traffic volume on a railway line per day
Medium impact TCR'		More than 50% of the estimated traffic volume on a railway line per day
Minor impact TCR ²	unspecified ³	More than 10% of the estimated traffic volume on a railway line per day

¹⁾ Commission Delegated Decision (EU) 2017/2075, article (11);

³⁾ according to Commission Delegated Decision (EU) 2017/2075, article (12) "7 consecutive days or less", modified here.



CS-Corridor

²⁾ Commission Delegated Decision (EU) 2017/2075, article (12).

Notwithstanding this categorisation, Czech-Slovak corridor strives to provide more detailed information, by applying the following criteria for publication:

At x-18-coordination:

- Continuous total closure of a line for more than 72 consecutive hours (3 days)
- Periodical total closure (e. g. every night) for more than 30 consecutive days
- Any other periodical (e. g. 3 hours every afternoon) or continuous TCR for more than 30 consecutive working days (e. g. closure of one track of a double track line, temporary TCR in a location); included in this category are speed, length, weight or traction restrictions

At x-12-coordination:

- Continuous total closure of a line for more than 24 consecutive hours (1 day)
- Periodical total closure (e. g. every night) for more than 14 consecutive days
- Any other periodical (e. g. 3 hours every afternoon) or continuous TCR for more than 14 consecutive working days (e. g. closure of one track of a double track line, periodical TCR in a location); included in this category are speed, length, weight or traction restrictions

After initial publication of TCRs, further details may be added when they are available.

4.6.2 Dates of publication

Corridor Czech – Slovak publishes the coordinated TCRs on the following dates:

	December 2018	December 2018	August 2019	December 2019	December 2019
Major	X (second publication)	X (first publication)		X (second publication)	X (first publication)
High	X (second publication)	X (first publication)		X (second publication)	X (first publication)
Medium	X (international impact)			X (international impact)	
Minor			Х		
Applicable timetable	TT 2020	TT 2021	TT 2020	TT 2021	TT 2022

BOX ZDE:

Notwithstanding the above publications dates, which are applied by the individual IMs as required by Annex VII mentioned above, Czech-Slovak corridor, as such, publishes TCRs on the following dates:

x-24 (December 13th 2019): First publication of TCRs according to Annex VII for TT 2022





- x-17 (July 31st 2019): Information on coordinated TCRs for TT 2021, based on results of the national consultation of applicants and the harmonisation between IMs; these TCRs are taken into consideration for the construction of PaPs
- x-12 (December 13th 2019): Detailed information on coordinated TCRs for TT 2021, issued prior to the publication of PaPs at x-11
- x-5 (July 31st 2019): Update of already published TCRs for TT 2020 due to late changes, and publication of minor TCRs according to Annex VII*.
- *) Regarding the requirements of Annex VII all minor TCRs known at x-6,5 (end of May) shall be published at x-4 (mid of August); Czech-Slovak corridor shortens this deadline to provide a harmonised publication date (July 31st) to its customers

4.6.3 Tool for publication

After coordination between all IMs involved on Corridor Czech – Slovak the results are published in the harmonised Excel overview on the Corridors' website.



TCR Excel list is published on Czech-Slovak corridor's weisite: http://www.szdc.cz/en/rfc9/dokumenty.html

As soon as the RNE TCR tool will be ready for use, Czech-Slovak corridor will publish the TCR on the tool. A provisionary double publication (Tool and Table) might occur for a transition period.

4.7 Legal disclaimer

By publishing the overview of the corridor TCRs, the IMs concerned present the planning status for TCRs to infrastructure availability along Czech-Slovak corridorThe published TCRs are a snapshot of the situation at the date of publication and are subject to further changes. The information provided can be used for rough orientation purposes only and may not constitute the basis for any legal claim.

The publication of TCRs at Corridor level does not substitute any national law or legislation. It lies within the IMs' responsibility to publish and communicate TCRs as stated in their Network Statements.

5 Traffic management

In line with Article 16 of Regulation (EU) No 913/2010, the management board of the freight corridor has put in place procedures for coordinating traffic management along the freight corridor.

Traffic Management is the prerogative of the national IMs and is subject to national operational rules. The goal of Traffic Management is to guarantee the safety of train traffic and achieve high quality performance. Daily traffic shall operate as close as possible to the planning.

In case of disturbances, IMs work together with the RUs concerned and neighbouring IMs in order to limit the impact as far as possible and to reduce the overall recovery time of the network. For international disruptions longer than 3 days with a high impact on international traffic, the international contingency management, as described in the International Contingency



Management handbook (ICM Handbook),

(http://www.rne.eu/rneinhalt/uploads/International_Contingency_Management_Handbook_final_v1.5.pdf) applies.

National IMs coordinate international traffic with neighbouring countries on a bilateral level. In this manner they ensure that all traffic on the network is managed in the most optimal way.

5.1 Cross-border section information

In the table below, all cross-border sections covered by Corridor Czech – Slovak are listed:

	CS-Corridor CS-Corridor		
C	Cross-border section	IM 1	IM 2
N	Nosty u Jablunkova – Čadca	SŽDC	ŽSR
F	Horní Lideč – Lúky pod Makytou	SŽDC	ŽSR

5.1.1 Technical features and operational rules

For all corridor related cross-border sections, the following information is available:

- > Technical features
 - Maximum train weight and train length
 - Railway line parameters (number of tracks, electrification, profile, loading and vehicle gauge, speed limit, axle load, etc.)
- Operational rules
 - o Languages used
 - Requirements running through the border (administrative and technical preconditions)
 - Special rules in case of system breakdown (communication system failure, safety system failure).

CS-Corridor CS-CORRIDOR

For Corridor Czech – Slovak the above-mentioned information can be found:

- By referring to the Network Statements of the IMs involved in the corridor
- By referring to the RNE website Traffic Management Information Border section information sheet within the Excel table (www.rne.eu/download/items/tmi-final-data-collection)
- By copying the corridor-relevant information published in Traffic Management Information – Border section information sheet (<u>www.rne.eu/download/items/tmi-final-data-collection</u>)

5.1.2 Cross-border agreements

Cooperation between the IMs on a corridor can be described in different types of agreements: in bilateral agreements between states (at ministerial level) and/or between IMs and in the detailed border section procedures.





Agreements applicable on Corridor Czech – Slovak can be found in the overview below and contain the following information:

- > Title and description of border agreement
- Validity
- Languages in which agreement is available
- Relevant contact person within IM.

ORFC9 CSCORRIDOR

CS-Corridor

On Corridor Czech – Slovak the above-mentioned overview information can be found:

- > By referring to the Network Statements of the IMs involved in the corridor
- By referring to the RNE website Traffic Management Information Border agreements Level 1 and Level 2 sheets within the Excel table (www.rne.eu/download/items/tmi-final-data-collection)
- By copying the corridor-relevant information published in Traffic Management Information – Border agreements Level 1 and Level 2 sheets (www.rne.eu/download/items/tmi-final-data-collection)

5.2 Priority rules in traffic management

In accordance with the Regulation, IMs involved in Corridor Czech – Slovak commit themselves to treating international freight trains running on the corridor or feeder / outflow lines that run punctually according to the timetable in such a way that a high quality and punctuality level of this traffic is ensured, but always within the current possibilities and within the framework of national operational rules.

To see the overview of national IM priority rules in traffic management, please visit: http://www.rne.eu/tm-tpm/other-activities-2/

5.3 Traffic management in the event of disturbance

The goal of traffic management in case of disturbance is to ensure the safety of train traffic, while aiming to quickly restore the normal situation and/or minimise the impact of the disruption. The overall aim should be to minimise the overall network recovery time.

In order to reach the above-mentioned goals, traffic management in case of disturbance needs an efficient communication flow between all involved parties and a good degree of predictability, obtained by applying predefined operational scenarios at the border.

In case of international disruptions longer than 3 days with a high impact on international traffic, the International contingency management procedures as described in Chapter 4.1 of the ICM Handbook apply.

5.3.1 Communication procedure

The main principle on which the communication procedure in case of disturbance is based is that the IM concerned is responsible for communication; it must deliver the information as soon as possible through standard channels to the RUs on its own network and to the neighbouring IMs.

In case of international disruptions longer than 3 days with a high impact on international traffic, the International contingency management communication procedures as described in Chapter 4.2 of the ICM Handbook apply.

CS-Corridor CS-CORRIDOR

For Corridor Czech - Slovak the details of the relevant communication procedure can be found:

 Detailed rules for communication in case of disturbance are included in bilateral agreements.

5.3.2 Operational scenarios within RFC in the event of disturbance

For international disruptions longer than 3 days with a high impact on international traffic, RFC with its member IMs and related RFCs developed an international corridor re-routing overview combining national re-routing plans across borders along the Corridor, according to Chapter 3 of the ICM Handbook.



No operational scenarios have been predefined on Corridor Czech – Slovak.

5.3.3 Allocation rules in the event of disturbance

In case of international disruptions longer than 3 days with a high impact on international traffic, the International contingency management allocation principles as described in chapter Chapter 3.2 of the ICM Handbook apply.

5.4 Traffic restrictions

Information about planned restrictions can be found in Chapter 4, Coordination and Publication of Planned Temporary Capacity Restrictions (TCRs).

CS-Corridor CS-CORRIDOR

On Corridor Czech-Slovak the information about unplanned restrictions can be found:

- > By referring to the Network Statements of the IMs involved in the RFC
- > By referring to the relevant section on the IMs' website

5.5 Dangerous goods

Detailed information about conditions for the transport of dangerous goods can be found in the Network Statements of IMs involved in Corridor [Corridor name]. Links to the network statements can be found in Book 2 of this CID.

5.6 Exceptional transport

Detailed information about conditions for the carriage of exceptional consignments can be found in the Network Statements of IMs involved in Corridor [Corridor name]. Links to the network statements can be found in Book 2 of this CID.



6 Train performance management

The aim of the Corridor Train Performance Management (TPM) is to measure punctuality, analyse weak points and recommend corrective measures, thus managing the train performance of international train services and improving punctuality across borders and handover points.

A necessary precondition for Train Performance Management is the implementation and use of the RNE Train Information System (as described in CID Book 1, Chapter 10 IT tools) by all involved IMs.



CS-Corridor

Corridor Czech – Slovak has set up a group within the framework of its organisational structure that is responsible for the train performance management of the corridor.



Annexes:

Annex 4.A Framework for Capacity Allocation

Actual Framework for Capacity Allocation can be found on corridor website below this link: http://www.szdc.cz/en/rfc9/dokumenty.html




Annex 4.B Table of deadlines


Date / Deadline	Date in X- System	Description of Activities
14 January 2019	X-11	Publication of PaP Catalogue
14 January 2019 – 28 January 2019	X-11 – X-10.5	Correction phase (corrections of errors to published PaPs)
8 April 2019	X-8	Last day to request a PaP
16 April 2019		Last day to inform applicants about the alternative PaP offer
22 April 2019	X-7.5	Last day for C-OSS to send PaP pre-booking information to applicants
1 July 2019	X-5	Publication of draft timetable
2 July 2019 – 2 August 2019	X-5 – X-4	Observations and comments from applicants
23 April 2019 – 21 October 2019	X-7.5 – X-2	Late path request application phase via the C-OSS
20 August 2019 - 18 November 2019	X-3.5 – X-1	Late path request allocation phase
19 August 2019	X-3.5	Publication of final offer
25 August 2019	X-2.5	Acceptance of final offer
15 October 2019	X-2	Publication of RC
15 December 2019	Х	Timetable change
15 October 2019 – 13 December 2020	X-2 - X+12	Application and allocation phase for RC



Annex 4.C Maps of Corridor Czech - Slovak

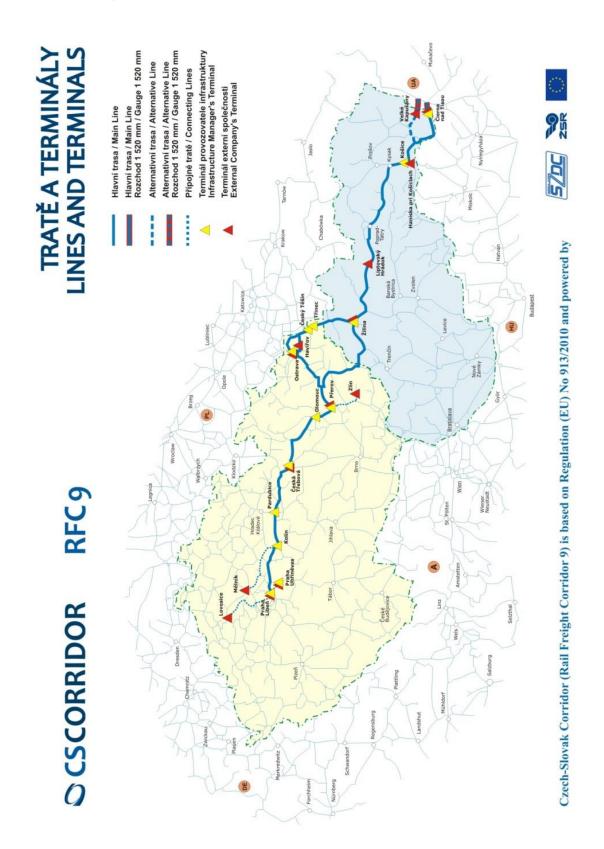

Schematic map – Czech-Slovak corridor

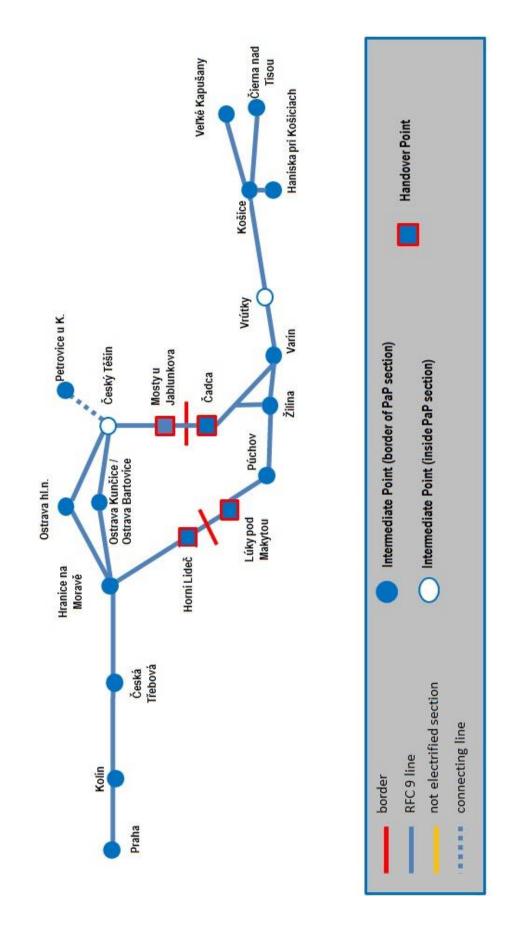





Annex 4.D Specialities on specific PaP sections on Corridor Czech - Slovak

There are no specialities on specific PaP sections on Corridor Czech – Slovak.

Annex 4.E Table of distances (PaP sections)

IM	PaP section	Number of kilometres	
	From	То	Km
	Praha-Libeň	Kolín	57,8
	Kolín	Česká Třebová	100,8
	Česká Třebová	Hranice na Moravě	134,8
	Hranice na Moravě	Horní Lideč	63,8
	Hranice na Moravě	Ostrava hl.n.	55,4
	Hranice na Moravě	Ostrava-Kunčice	55,4
SŽDC	Ostrava hl.n.	Český Těšín	38,3
0)	Ostrava-Kunčice	Český Těšín	29,2
	Petrovice u Karviné	Český Těšín	24,8
	Český Těšín	Ostrava-Bartovice	24,9
	Ostrava-Bartovice	Hranice na Moravě	59,7
	Český Těšín	Mosty u Jablunkova	29,1
	Mosty u Jablunkova	Čadca	10,4
	Horní Lideč	Lúky pod Makytou	14,3
	Lúky pod Makytou	Varín	67,2
	Čadca	Varín	38,8
	Varín	Vrútky	12,6
S.R	Vrútky	Košice	221,4
ŽSR	Košice	Čierna nad Tisou	98,4
	Košice	Maťovce	98,7
	Košice	Haniska pri Košiciach	11,3
	Haniska pri Košiciach	Veľká Ida	7,2
	Čadca	Žilina-Teplička	34,7